

## Groomers Extreme H-Bar Assembly

### **Included:**

1 x Right Vertical H-Bar Arm

1 x Left Vertical H-Bar Arm

1 x Horizontal H-Bar

2 x Clamp Brackets

2 x Grooming Supports

Adjustment Knobs



8 x Large Washers

2 x Medium Washers


8 x Short Bolts

2 x Nuts

8 x Mini Washer

1 x Allen Key


2 x Long Bolts

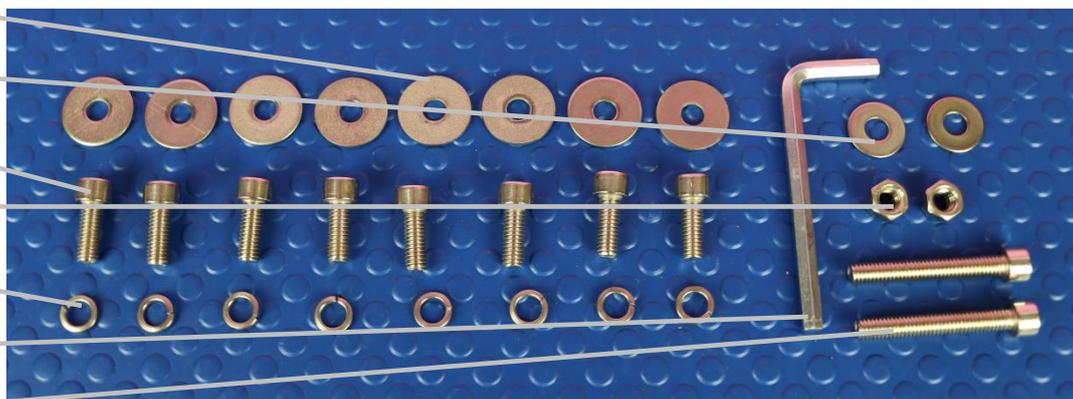


**You will need 1 small spanner or 1 pair of pliers**

### **Stage 1 – Assembling The Horizontal H-Bar**


- 1.) Start by attaching the horizontal h-bar to the vertical h-bar arms. Line up the holes at the end of the horizontal h-bar with your chosen vertical h-bar arm (as below), ensuring that the holes on the vertical h-bar arm overlap the horizontal h-bar at the top and bottom. Make sure the grooming hooks are facing downwards on the horizontal h-bar.

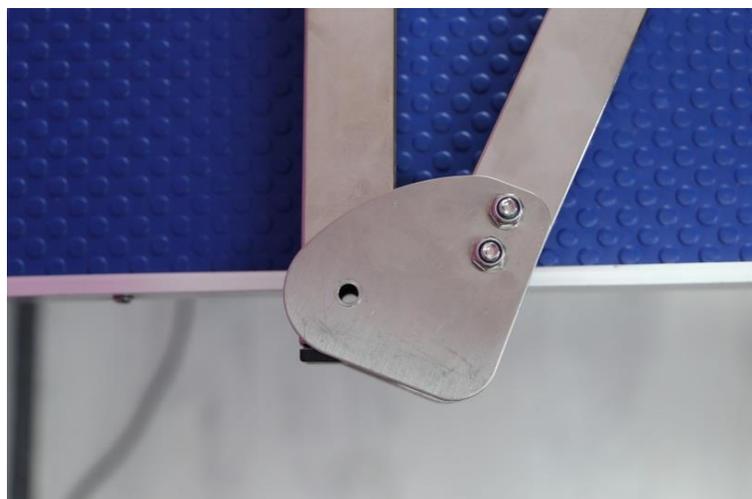

- 2.) Put one long bolt through the bottom and feed through the 4 lined up holes. Once the bolt is fully through, place the medium washer over and screw one nut finger tight over the top.


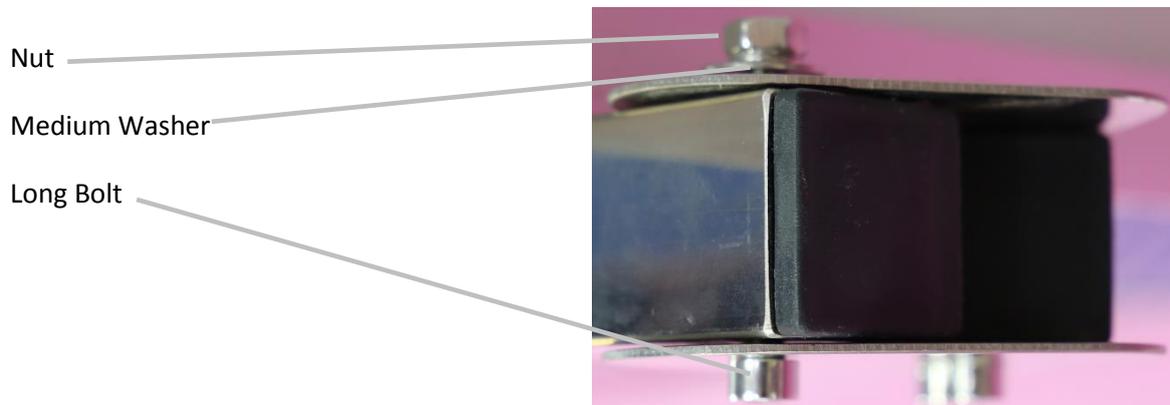


- 3.) Flip the H-Bar if necessary (as pictured, depends on how you most feel comfortable tightening it up), hold the nut with a pair of plyers (or small spanner) and then tighten the bolt with the Allen key. Repeat on the other side with the other vertical H-bar arm and set the completed horizontal H-Bar aside.

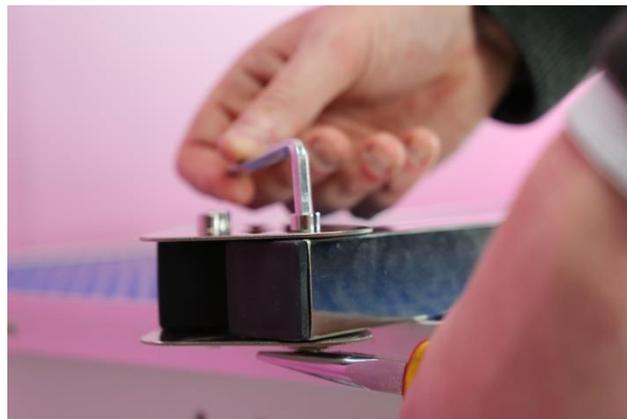

## **Stage 2 – Attaching The H-Bar To The Table**

- 4.) Put the mini washer onto the screw, followed by the bigger washer as in the picture below.

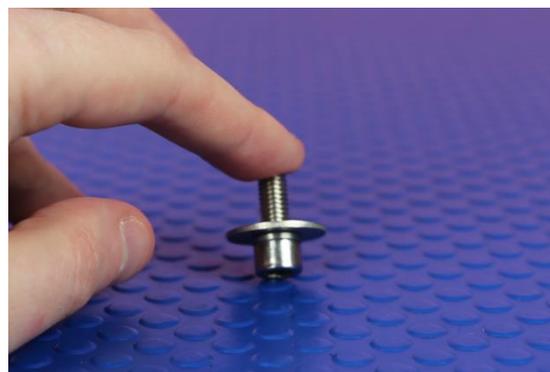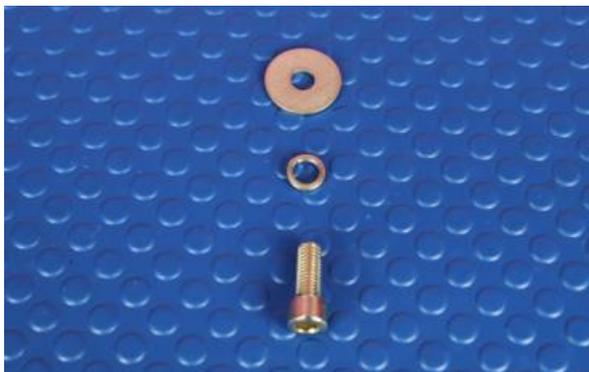

- 5.) Line up the 4 clamp bracket holes with the threaded holes at the side of the table.



- 6.) Tighten the screw (with the washers) finger-tight in each of the 4 holes on the side of the table, leaving some give, so it is easier to line up and slot in the horizontal h-bar. Repeat on the other side.



- 7.) Slot the assembled horizontal h-bar into both side clamp brackets.



- 8.) Once the horizontal h-bar is in place, tighten the screws at the side of each table using the Allen key to firmly fix them into place.



- 9.) Use the adjustment knob near the top of each clamp bracket to change the H-Bar to the desired height and fix it into place.



- 10.) Your Extreme H-Bar is finished! Now you will only need to use the adjustment knobs to alter the height of the h-bar as required.

